

JascoPro Z-Wave Plug-in Smart Dimmer

JASCO PRO™



Specifications

Power: 125VAC, 60Hz **Signal Frequency:** 908.4/916MHz

Maximum Load: 300W (2.5A) incandescent, 150W dimmable CFL/LED

Classic Range: Up to 150ft. line of sight to the wireless controller and closest Z-Wave receiver module

Long Range: Up to 1,300ft. line of sight to the wireless controller

Operating Temperature: 32-104° F (0-40° C)

Z-Wave Module: 800 series

Warranty: 5-year limited product warranty

For indoor use only


Design Features

- Two simultaneously controlled Z-Wave outlets for dimmable LED, CFL, incandescent and halogen lighting
- Remote ON/OFF and brightness control via the Z-Wave controller
- Manual ON/OFF and brightness control with the front push button
- Remotely monitor with any mobile device*
- Can be included in multiple groups and scenes
- Supports Z-Wave Long Range and standard Z-Wave based on hub capabilities
- Uses the Z-Wave firmware update meta data command class for standardized firmware updates over the air
- Security tab secures the plug to the wall outlet
- Z-Wave Long Range Plus certified
- Trilingual instruction manual – English, French, Spanish

Z-Wave Long Range with S2 Security and SmartStart Features

- QR codes with unique, industry-standard secure key exchange to add a layer of 128-bit encryption
- Effortless device pairing to Z-Wave S2 and SmartStart certified gateways
- Backward compatible with all generations of Z-Wave devices
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home
- Improved battery life and up to 50% greater wireless range



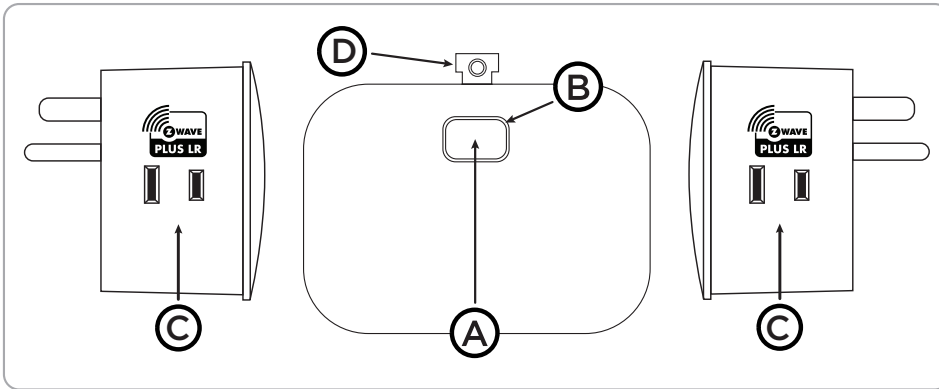

- A. Manual/program button**
Single press – turn ON/OFF the device
Press and hold – dim/brighten the lamp
Single press – include or exclude in Z-Wave network
- B. LED indicator**
- C. Z-Wave controlled outlets** – remotely turn ON/OFF and dim the connected device(s) simultaneously
- D. Security tab** – secures the plug to the wall outlet

Device Configuration

Adding your device to a Z-Wave network

1. Follow the instructions for your Z-Wave certified controller to add a device to the Z-Wave network.
2. Once the controller is ready to add your device, press the program button of the smart dimmer.

You have complete control to turn your lamp ON/OFF and adjust brightness according to groups, scenes, schedules and interactive automations programmed by your controller.

If your Z-Wave certified controller features remote access, you can control your lamp from your mobile devices.

If prompted by the controller to enter the S2 security code, refer to the QR code/security number on the side of the box or the QR code label on the product (see Figure 1). Enter the 5-digit code.

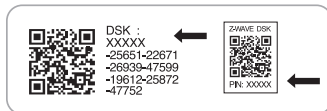


Figure 1

To return to factory defaults

1. If plugged in, unplug the dimmer from the receptacle.
2. Press and hold the program button for at least three seconds while you plug the dimmer into a receptacle.

NOTE: This should only be used if your network's primary controller is missing or otherwise inoperable.

NOTE: SmartStart enabled products can be added into a Z-Wave network by scanning the QR code on the product with a controller providing SmartStart inclusion. No further action is required and the SmartStart product will be added automatically within 10 minutes of being switched on in the network vicinity.

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice.

Distributed by Jasco Products Company LLC
 10 E. Memorial Rd., Oklahoma City, OK 73114.

Questions? Contact our U.S.-based dedicated support at 1-833-981-0170, M-F.

©Jasco 2025

Related Products - JascoPro Z-Wave Plug-In Smart Controls



76724
 Plug-in Smart Switch



79244
 Plug-in Smart Switch



Scan to see full line of products or visit jascopro.com